

01717700


ActiFlow®

SS SAMPLING VALVE
FOR REACTOR
TOP INSTALLATION
MULTIFUNCTION

EDELSTAHL PROBENAHMEVENTIL
FÜR BEHÄLTER
EINBAU VON OBEN
MULTIFUNKTIONELL

PRELEVEUR INOX
POUR CUVE
MONTAGE PAR EN HAUT
MULTIFONCTION

Material | Werkstoff | Matière
1.4435 / 1.4404 (316L)
PTFE / BOROSILICATE

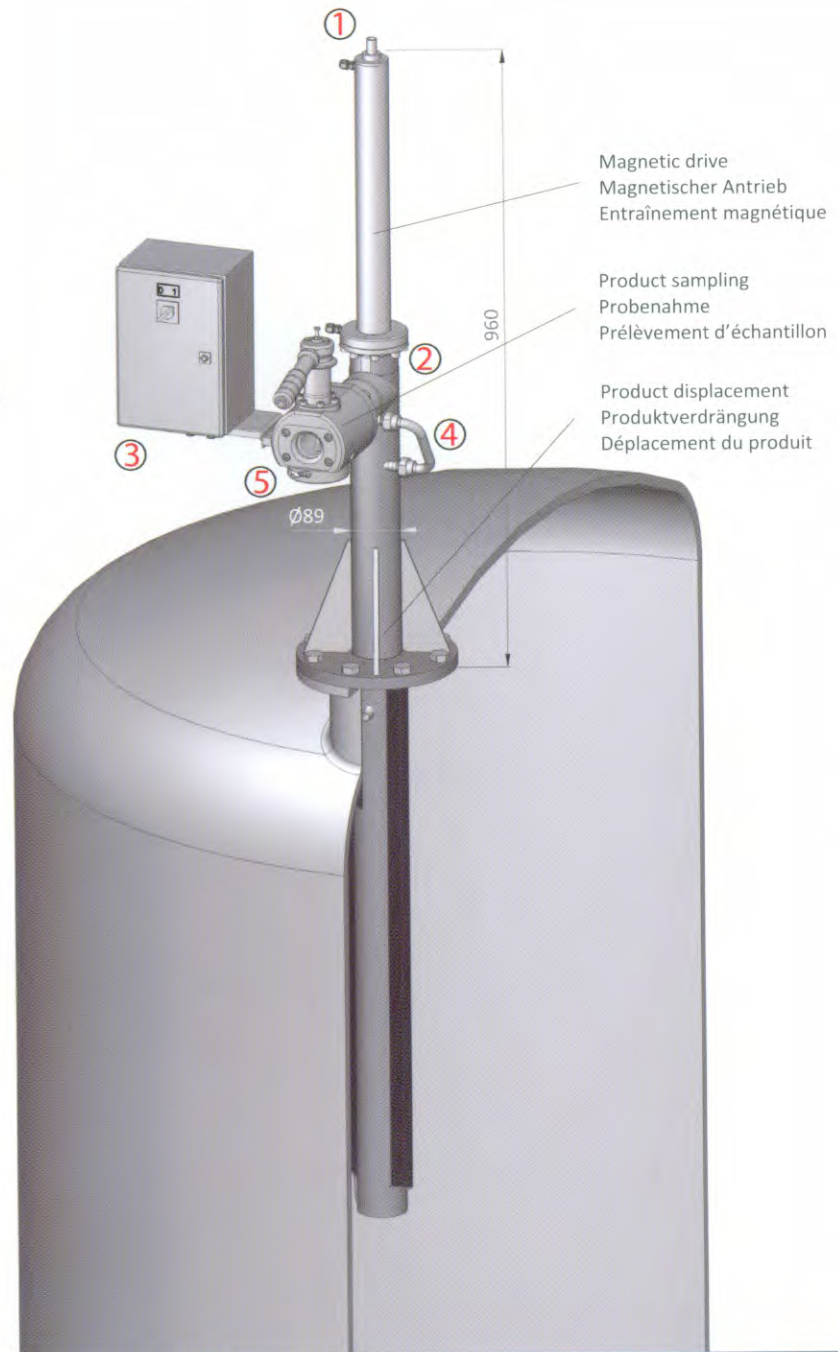

INFOS

1	Rinsing connection Spülanschluss Connexion de rinçage
2	Heating/Cooling jacket connection Heiz-/Kühlmantel-Anschluss Connexion double enveloppe = PN40 (580 psi) PS : 32 bar @ 180°C (464psi @ 356°F) TS : -40 +180°C (-40 +356°F)
3	Air pressure Luftdruck Pression Air : Min. 3 bar (43 psi) - Max. 10 bar (145 psi)
4	OPTION : Measuring cup Messtopf Pot de mesure (p.e pH)
5	Quick connection for accessories Schnellanschluss für Zubehör Connexion rapide pour accessoires

ACTIFLOW

PS -1 → 16 (bars)
TS -20 → 200 (°C)