

01717700


ActiFlow®

**SS SAMPLING VALVE**  
FOR REACTOR  
TOP INSTALLATION  
MULTIFUNCTION

**EDELSTAHL PROBENAHMEVENTIL**  
FÜR BEHÄLTER  
EINBAU VON OBEN  
MULTIFUNKTIONELL

**PRELEVEUR INOX**  
POUR CUVE  
MONTAGE PAR EN HAUT  
MULTIFONCTION

**Material | Werkstoff | Matière**  
1.4435 / 1.4404 (316L)  
PTFE / BOROSILICATE

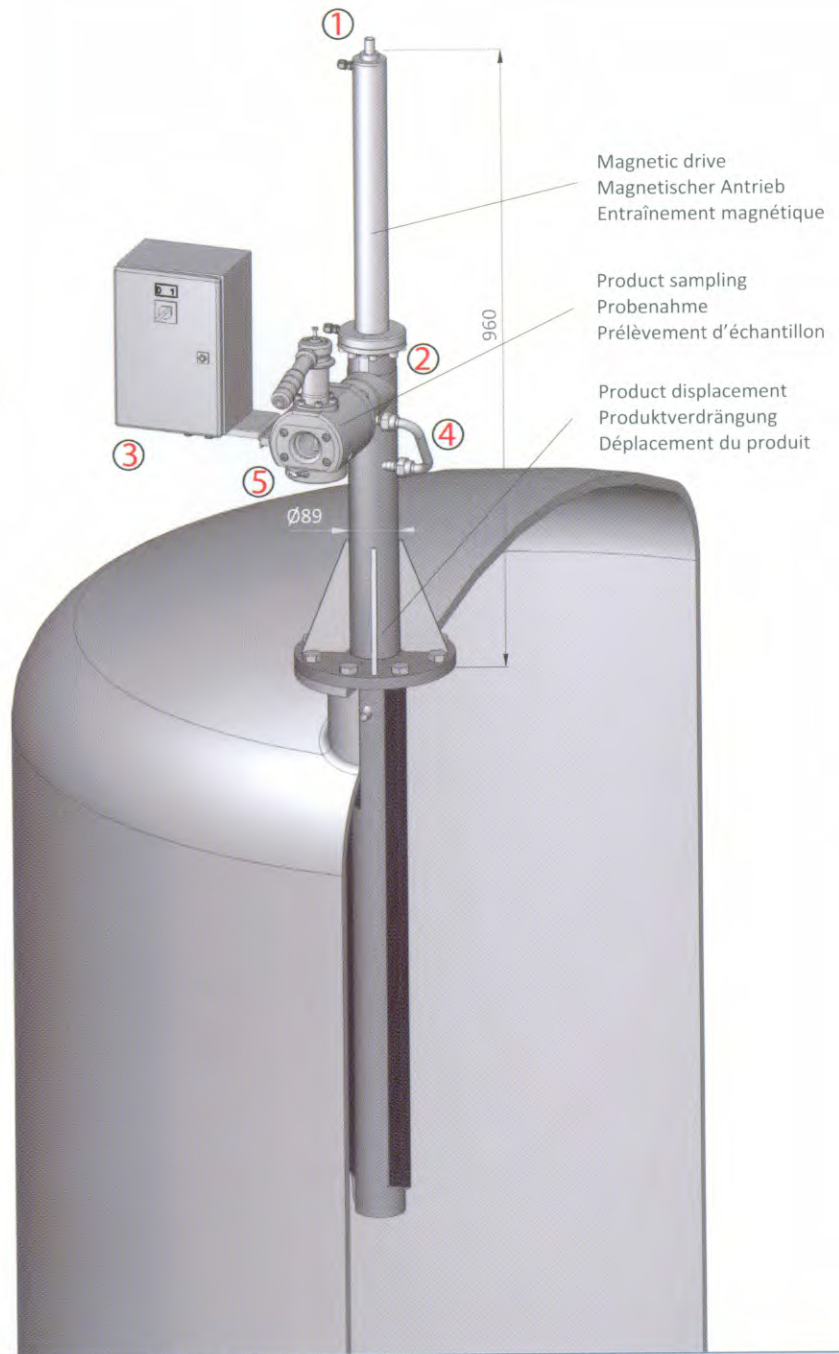

**INFOS**

1	Rinsing connection   Spülanschluss   Connexion de rinçage
2	Heating/Cooling jacket connection   Heiz-/Kühlmantel-Anschluss   Connexion double enveloppe = PN40 (580 psi) PS : 32 bar @ 180°C (464psi @ 356°F)   TS : -40 +180°C (-40 +356°F)
3	Air pressure   Luftdruck   Pression Air : Min. 3 bar (43 psi) - Max. 10 bar (145 psi)
4	OPTION : Measuring cup   Messtopf   Pot de mesure (p.e pH)
5	Quick connection for accessories   Schnellanschluss für Zubehör   Connexion rapide pour accessoires

**ACTIFLOW**

PS -1 → 16 (bars)  
TS -20 → 200 (°C)